


# FMWSP6 Screen Protector Installation Instructions

## Stylistic 2300


The FMWSP6 screen protector can be installed on the Stylistic 2300 pen tablet display screen or on the display window of the FMWCC30 harsh environment case. Note the following:

- Before installing a new screen protector, remove any screen protector that is already installed. (A notch in the corner of the screen protector allows you to slide your fingernail or a sharp implement under the screen protector for removal.)
- To ensure good adhesion, clean the display screen with a soft cotton cloth dampened with denatured alcohol before installing the screen protector.


1. For installation on the **Harsh Environment Case only**: Remove edge from screen protector.




2. Peel protective film from adhesive side of screen protector.



3. Install the screen protector. Apply the adhesive side to the screen with the notch in the lower left corner. **Apply pressure along the edge of the screen protector with your finger.** (Avoid lifting the screen protector from the screen after it is installed. The adhesive requires 48 hours to cure.)

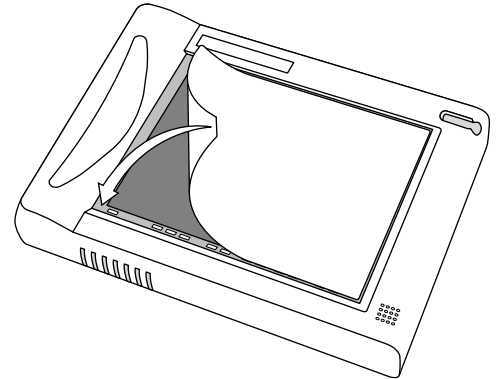

4. Remove the protective film from top of the screen protector.

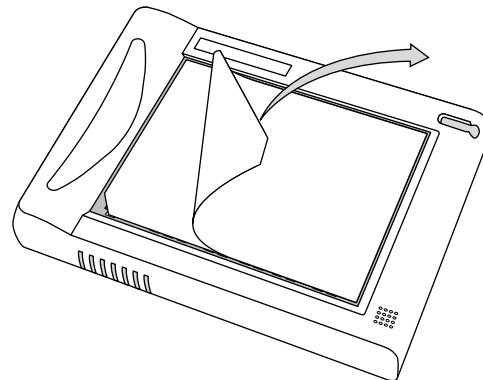

5. Clean the exposed surface of the screen protector with a soft cotton cloth dampened with denatured alcohol to remove any adhesive left behind by the protective film.